

# **P110 PRESSURE SWITCH SERIES**

Industry leading customers have depended upon the reliable performance of the P110 Series since 1987. This series features a stainless steel body and a dual seal construction. The P110 Series incorporates Wasco's proprietary manufacturing method that we have perfected over the last three decades.

This series is a rugged pressure switch that is perfect for industrial systems that require cost-effective reliability.



### **P110 SERIES HIGHLIGHTS**

We've designed the P110 series for high performance and dependability. All P110 Series switches are leak tested to  $\leq 1 \times 10^{-3}$  std cc/min Air.

#### TYPICAL APPLICATIONS

- Gas Systems
- Air Filtration
- Medical
- HVAC-R
- Aerospace
- Food Processing
- Transportation Equipment

# **P110 SERIES PERFORMANCE CHART**

Sensor	Max. System Pressure* (PSIG)	Set Point Range* (PSIG)	Set Point Tolerance (PSI)	Typical Reset Band (PSI)
3	30.0	1.0 - 30.0	± 0.7	0.7 - 2.3
5	125.0	3.0 - 125.0	± 2.0	1.3 - 3.8
8	250.0	8.0 - 250.0	± 5.0	2.0 - 10.0

<sup>\*</sup> Other ranges available












# **MATERIAL SPECS**

# **TECHNICAL SPECS**


	Wetted Components
Fitting	300 Series SS
Sensor	17-7PH SS
O-Ring	Buna, Viton, or EPR

Life Cycle	≥1,000,000 cycles
Ingress Protection	IP65
Leak	100% Tested
Rate	to ≤ 1 x 10 <sup>-3</sup> std cc/min
Operating	-65° to 225°F
Temp	-54° to 107°C

# **P110 DIMENSIONS**

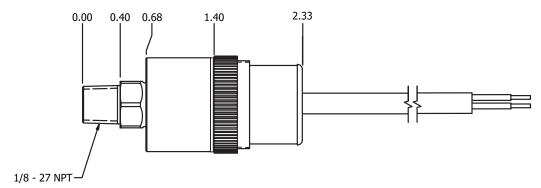

Typical P110 with 1/8-27 NPT and jacketed wire leads (other configurations available)

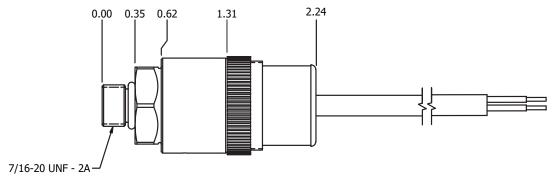

Typical P110 with 7/16-20 UNF and jacketed wire leads (other configurations available)

We understand how difficult the specifying process is, but we believe it shouldn't be so confusing. Wasco has specified over 6000 unique pressure sensors for thousands of customers since 1963.

# Find your solution today by filling out our worksheet.





